

New Mexico

HIGHLANDS

University

Box 9000

Las Vegas, New Mexico 87701

Tel: 505 425-7511

To: All Planholders
Date: October 9, 2009
Re: **Addendum Number One**


New Mexico Highlands University
Invitation for Bid #873-Engineering Building Drainage Improvements
Las Vegas, New Mexico


Description of Changes:

- 1) Keyed note #1 on Sheet G-1 for the 8-inch curb and gutter suggest that the detail for the curb and gutter is indicated on Sheet G-1, but is not present. Attached is the curb & gutter detail to be used for this project.
- 2) The concrete rundown may be formed and placed under the existing fence and existing electrical conduit as long the typical section and geometry for the concrete rundown is constructed as indicated in the plans. The grades at this location may be lowered and modified as required and approved by the engineer to accomplish this work.
- 3) The clearing and grubbing for the base bid shall be accomplished as outlined in the NMDOT specifications for the project as required to accomplish the work outlined in the base bid for the project. This work shall be considered incidental to the project and no separate measure or payment will be made for this work.
- 4) The clearing and grubbing for the additive alternate shall be accomplished as outlined in the NMDOT specifications for the project as required to accomplish the work outlined in the additive alternate for the project. In additional, all trees, stumps, roots and other deleterious debris shall be removed, hauled and disposed of to an environmentally safe location. The slope shall be sterilized to kill all vegetation prior to the placement of the shotcrete. All of this work shall be paid for under the Shotcrete Item in the additive alternate and no separate measurement or payment will be made for this work.
- 5) Concerning the question raised about the licensure required for the work outlined in this contract, as outlined in the State Statute, it appears that either a GA-1 or GA-98 would be adequate license classifications to complete the work outlined in this contract.

General:

- 1) The project advertisement was not published, therefore there was inadequate notice provided for the mandatory walk-through. A revised advertisement is being published and as a remedy for the walk-through another mandatory walk-through will be held on Tuesday, October 20, 2009 at 2 P.M. Prospective bidders who attended the first mandatory walk-through will not be required to attend the mandatory walk-through on the 20th. Bidders need to attend only one of the walk-throughs. The walk-through will be held at the site which is located at 916 Eleventh Street, Las Vegas, New Mexico.
- 2) The bid opening date has been changed to Tuesday, October 27, 2009 at 3:00 P.M. local time.
- 3) All other requirements associated with this project will remain unchanged.

 10/9/09
Michael Saavedra, Senior Buyer Date
New Mexico Highlands University
Purchasing Department
PO Box 9000
Las Vegas, New Mexico 87701
phone: 505-454-3053
fax: 505-454-3109

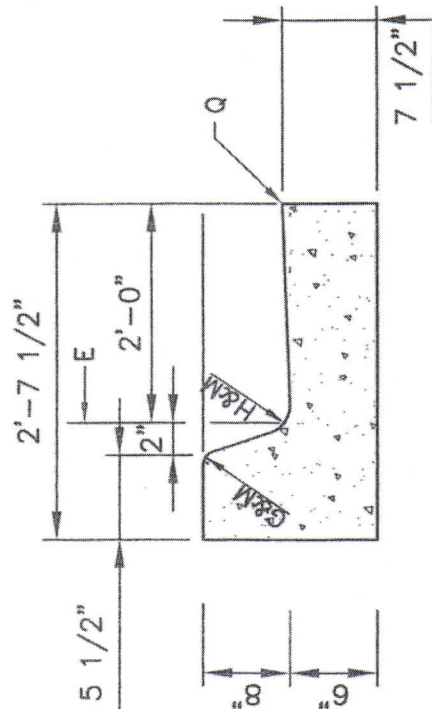

STANDARD CURB & GUTTER

SCALE: NONE

CONSTRUCTION NOTES

- A. REQ. CONC. CHANNEL LINING, OR CUT-OFF WALL, PROVIDE 1/4" EXP JOINT BETWEEN BACK OF CURB & CHANNEL LINING AND/OR WALL.
- B. VARIABLE, DEPRESS AS NEEDED.
- C. DRIVE NO. 4 PINS 18" DEEP IN HOLES DRILLED @ 2" O.C. IN EXISTING PAVEMENT, SEAL WITH EPOXY.
- D. EXISTING ASPHALT CONCRETE (AC) OR PORTLAND CEMENT CONCRETE (PCC) PAVEMENT.
- E. THEORETICAL FACE OF CURB OR FLOWLINE.
- F. TRAFFIC SIDE.
- G. 3/4" RADIUS.
- H. 1-1/2" RADIUS.
- J. 2" RADIUS.
- K. 24" RADIUS.
- L. TACK COAT.
- M. DIMENSIONS AT ROUNDED CORNERS MEASURED TO INTERSECTION OF STRAIGHT LINES.
- N. 4" AC: MAJOR LOCAL OR BETTER (SP-III)
3" AC: LOCAL RESIDENTIAL STREET (TYPE C)
2" AC: BICYCLE PATH (TYPE 9, RESIDENTIAL)
- P. 8" SCARIFIED AND COMPACTED SUBGRADE. 95% MINIMUM COMPACTION PER SECTION 301.
- Q. AC PAVEMENT.
- R. #4 CONT. BETWEEN JOINTS 3" COVER AT JOINTS.
- S. #3 PINS @ 3'-0" O.C. W/STD. HOOK.

GENERAL NOTES
SEE COA DRAWING 2415A

REVISIONS	CITY OF ALBUQUERQUE
9/91	PAVING
11/14/91	CURB AND GUTTER &
12/15/92	TEMPORARY PAVING SECTION
3/30/94	DWG. 2415B JANUARY 2003