



MILLER ENGINEERING CONSULTANTS

Engineers • Planners

ADDENDUM #1

To: All Planholders

Date: March 3, 2010

RE: Diamond/Douglas Parking Lot Improvements

Description of Changes:

Drawings:

- 1) Sheet C-2 – General Note No. 36 shall read “All Borrow (fill) material for this project shall consist of an Engineered Fill material. The contractor shall provide submittals to the project engineer for review prior to construction.”
- 2) Sheet C-3 – In the Summary of Quantities, the NMDOT Item No. 451060 – Concrete Pavement – 6” shall be replaced by NMDOT Item No. 422270 – Plant Mix Bituminous Pavement (PMBP) SP IV – 3”.
- 3) Sheet G-1 – Key Note number three shall read “New 3” Asphalt Paving Surface” **NOT** “New 6” Concrete Paving Surface”.
- 4) Sheet D-1 – Replace Typical 6” Concrete Section with Typical Asphalt Paving Detail shown on Exhibit A attached hereto.

Contract Documents and Specifications:


- 1) The existing BID FORM shall be replaced by the BID FORM attached hereto, Sheets BID-1 through BID-5.

General:



- ☐ All other requirements associated with this project will remain unchanged.

MILLER ENGINEERING CONSULTANTS, INC.

Verlyn A. Miller, P.E. 3/3/10
Date

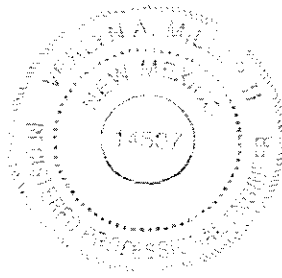


3500 Comanche NE, Building F, Albuquerque, NM 87107
Phone (505) 888-7500 • Fax (505) 888-3800 • www.mecnm.com

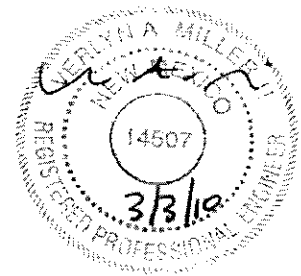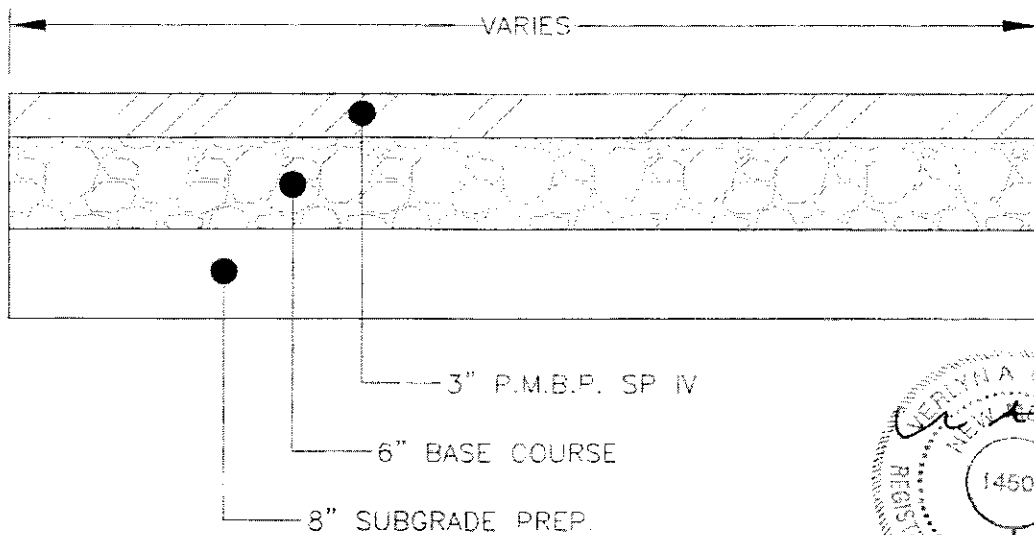

TYPICAL ASPHALT PAVING DETAIL

SCALE: NONE



DOUGLAS PARKING LOT IMPROVEMENTS

New Mexico Highlands University
project no. 09-059

FOR SHEET D-1
REPLACE TYPICAL 6" CONCRETE SECTION
MARCH 3, 2010

EXHIBIT A

ASPHALT PAVING SECTION